


PX2K-X CABLE GLAND

- Type of Cable Gland : DNCEX / PX2K-X
- Cable Type : Wire Braid Armoured, Steel Tape Armoured or Screened Flexible Wire Braid.
- Sealing Area : Inner Compound Barrier & Cable Outer Sheath.
- Indoor and Outdoor use / Dual certified Ex 'd' & Ex 'e'
- Operating Temperature : -60°C to +100°C.
- Materials : Brass, Brass with nickel plated, Aluminum and Stainless Steel 316.
- According to BS, IEC & CENELEC suitable for use in Zone1, Zone2, Zone21 and Zone22, Gas Groups, IIA, IIB and IIC.
- Ingress Protection : IP66/67
- Certificate No : Baseefa11ATEX0004X & IECEx BAS11.0001X

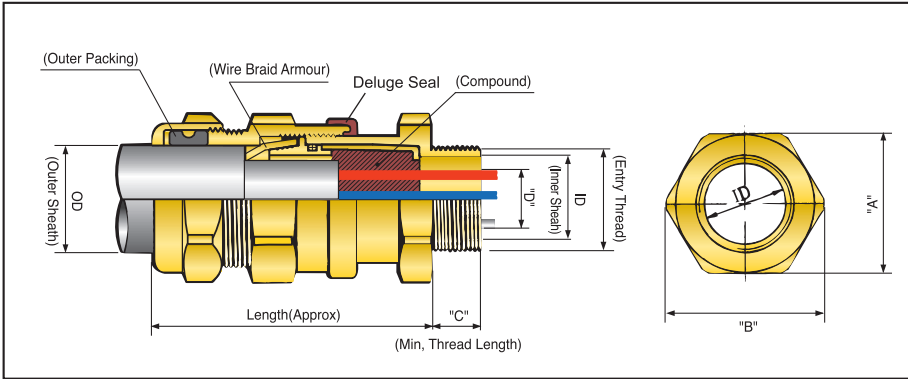

HAZARDOUS AREA CABLE GLAND

Gland Size	Entry Thread Size		Cable Acceptance Details						Hexagon Dimensions		Thread Length "c"	
			Inner Sheath / Cores			Outer Sheath 'OD'		Single Wire Armour	Across Flats "A"	Across Corners "B"	Metric (optional)	NPT
			"D" Max Over Cores	"ID" Max Over Cores	Max. No. of Cores	Min.	Max.					
DNCEX-20a	M20	1/2"	8.9	10.0	6	7.0	12.0	0/0.7	24.0	26.8	15(20)	20
DNCEX-20b	M20	1/2"	8.9	10.0	6	11.0	16.0	0/0.7	24.0	26.8	15(20)	20
DNCEX-20d	M20	1/2"	11.0	12.5	10	14.3	20.0	0/0.7	30.0	33.5	15(20)	20
		3/4"										
DNCEX-25a	M25	3/4"	16.5	18.3	21	18.5	26.0	0/0.7	36.0	40.5	15(20)	20
		1"										25
DNCEX-32	M32	1"	22.0	24.5	42	24.0	33.0	0/0.7	45.8	51.2	15(20)	25
		1-1/4"										25.6
DNCEX-40a	M40	1-1/4"	26.5	29.5	60	28.0	35.0	0/0.7	55.0	61.5	15(20)	25.6
		1-1/2"										26
DNCEX-40	M40	1-1/4"	26.5	29.5	60	30.0	41.0	0/0.7	55.0	61.5	15(20)	25.6
		1-1/2"										26
DNCEX-50a	M50	1-1/2"	37.0	41.7	80	36.0	45.0	0/1.0	65.0	72.8	15(20)	26
		2"										27
DNCEX-50	M50	1-1/2"	37.0	41.7	80	42.0	52.6	0/1.0	65.0	72.8	15(20)	26
		2"										27
DNCEX-63a	M63	2"	47.8	53.5	100	46.0	56.0	0/1.0	80.0	89.5	15(20)	27
		2-1/2"										40
DNCEX-63	M63	2"	47.8	53.5	100	52.0	65.5	0/1.0	80.0	89.5	15(20)	27
		2-1/2"										40
DNCEX-75a	M75	2-1/2"	59.0	65.3	140	57.0	67.0	0/1.0	95.0	104.5	15(20)	40
		3"										41.5
DNCEX-75	M75	2-1/2"	59.0	65.3	140	64.0	78.3	0/1.0	95.0	104.5	15(20)	40
		3"										41.5
DCEX-90	M90	3-1/2"	71.0	75	180	75.0	89.5	0/1.0	115.0	123	20(25)	42.7

Accessories

Lock-Nut, Sealing washer, Serrated washer, Earth Tag and PVC Shroud - see page A40


How to order

DNCEX-25a-3/4NPT



PX2K-W CABLE GLAND

- Type of Cable Gland : DNCEX / PX2K-W
- Cable Type : Single Wire Armoured(SWA) - Steel or Aluminum Wire Armoured.
- Sealing Area : Inner Compound Barrier & Cable Outer Sheath.
- Indoor and Outdoor use / Dual certified Ex 'd' & Ex 'e'
- Operating Temperature : -60°C to +100°C.
- Materials : Brass, Brass with nickel plated, Aluminum and Stainless Steel 316.
- According to BS, IEC & CENELEC suitable for use in Zone1, Zone2, Zone21 and Zone22, Gas Groups, IIA, IIB and IIC.
- Ingress Protection : IP66/67
- Certificate No : Baseefa11ATEX0004X & IECEx BAS11.0001X

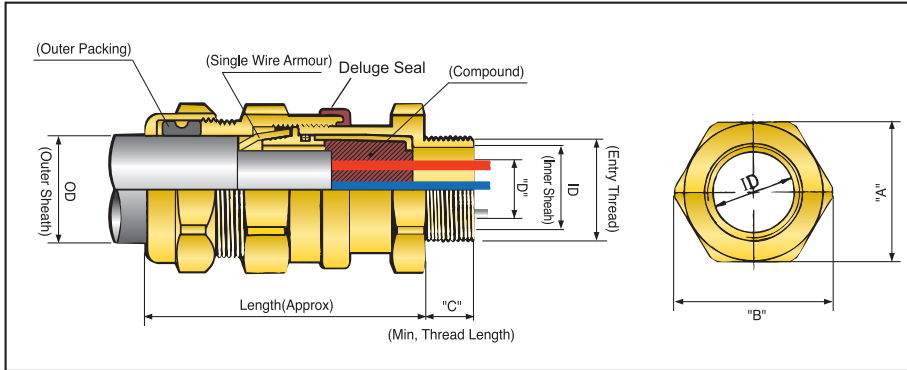

HAZARDOUS AREA CABLE GLAND

Gland Size	Entry Thread Size		Cable Acceptance Details						Hexagon Dimensions		Thread Length "c"	
			Inner Sheath / Cores			Outer Sheath 'OD'		Single Wire Armour	Across Flats "A"	Across Corners "B"	Metric (optional)	NPT
			"D" Max Over Cores	"ID" Max Over Cores	Max. No. of Cores	Min.	Max.					
DNCEX-20a	M20	1/2"	8.9	10.0	6	7.0	12.0	0.8/1.25	24.0	26.8	15(20)	20
DNCEX-20b	M20	1/2"	8.9	10.0	6	11.0	16.0	0.8/1.25	24.0	26.8	15(20)	20
DNCEX-20d	M20	1/2"	11.0	12.5	10	14.3	20.0	0.8/1.25	30.0	33.5	15(20)	20
		3/4"										
DNCEX-25a	M25	3/4"	16.5	18.3	21	18.5	26.0	1.25/1.6	36.0	40.5	15(20)	20
		1"										25
DNCEX-32	M32	1"	22.0	24.5	42	24.0	33.0	1.6/2.0	45.8	51.2	15(20)	25
		1-1/4"										25.6
DNCEX-40a	M40	1-1/4"	26.5	29.5	60	28.0	35.0	1.6/2.0	55.0	61.5	15(20)	25.6
		1-1/2"										26
DNCEX-40	M40	1-1/4"	26.5	29.5	60	30.0	41.0	1.6/2.0	55.0	61.5	15(20)	25.6
		1-1/2"										26
DNCEX-50a	M50	1-1/2"	37.0	41.7	80	36.0	45.0	1.8/2.5	65.0	72.8	15(20)	26
		2"										27
DNCEX-50	M50	1-1/2"	37.0	41.7	80	42.0	52.6	1.8/2.5	65.0	72.8	15(20)	26
		2"										27
DNCEX-63a	M63	2"	47.8	53.5	100	46.0	56.0	1.8/2.5	80.0	89.5	15(20)	27
		2-1/2"										40
DNCEX-63	M63	2"	47.8	53.5	100	52.0	65.5	1.8/2.5	80.0	89.5	15(20)	27
		2-1/2"										40
DNCEX-75a	M75	2-1/2"	59.0	65.3	140	57.0	67.0	1.8/2.5	95.0	104.5	15(20)	40
		3"										41.5
DNCEX-75	M75	2-1/2"	59.0	65.3	140	64.0	78.3	1.8/2.5	95.0	104.5	15(20)	40
		3"										41.5
DCEX-90	M90	3-1/2"	71.0	75	180	75.0	89.5	1.8/3.2	115.0	123	20(25)	42.7

Accessories

Lock-Nut, Sealing washer, Serrated washer, Earth Tag and PVC Shroud are available - see page A40

How to order

DNCEX-25a-M25

